



Woven Woods

(Installation Instructions - Outside Mount)


Step 1 Using nuts and bolts, secure a headrail clip to each L-Bracket, making sure that the clips are mounted to the center of the middle hole on each L-Bracket. (Approx. 2 1/2" from the back of the L-bracket). This will give the clearance for the drapery to slide under the Cornice without obstruction.

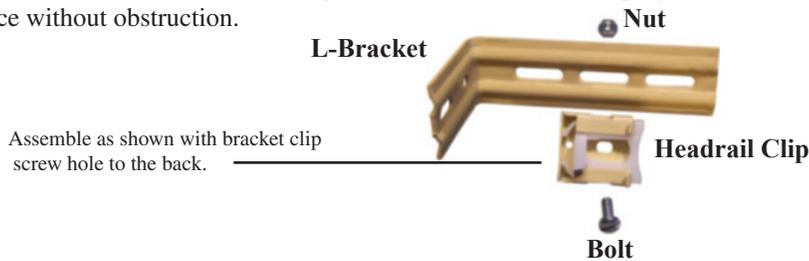

Step 2 Snap assembled brackets onto headrail. Begin on the side of the track where the Vertical Woven Wood will stack when completely open. Place 1 bracket as close to the end as possible. Place a second bracket along the rail 12" from the first. (For widths greater than 96", place a third bracket along the rail 12" from the second.) Place additional brackets along the rail 24" apart. Make sure your last bracket is close to the opposite stack end.



Step 3 Insert a small screw into the hole at the back of each bracket clip. Tighten each screw. This step is IMPORTANT to keep your headrail secure in the brackets. Failure to attach screws will cause the headrail track to fall.

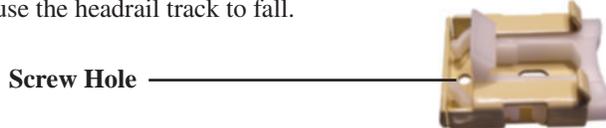


The screw locks the bracket clip in place after it is attached to the Headrail, preventing the bracket clip from disengaging.


Step 4 Attach assembled track with brackets to the mounting strip with screws provided. The top edge of the bracket should be flush with the top edge of the mounting strip. The open end of the rail is on the left for a left panel and on the right for a right panel.

Step 5 Beginning with the Leading Rail, insert the Woven Wood Panel into the open end of the headrail track, making sure each white knob is inserted into the rail. If the track was installed properly, the material will be facing the correct direction.

Step 6 Attach a headrail end cap to the open end of the headrail track. Insert end locking bracket to underside of the (headrail and end cap) using the nut and bolt provided.

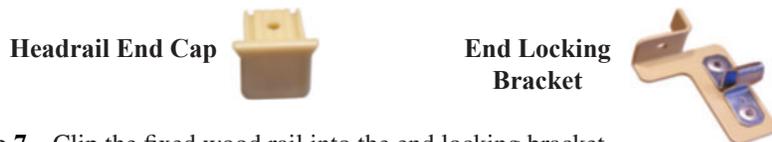

Step 7 Clip the fixed wood rail into the end locking bracket.

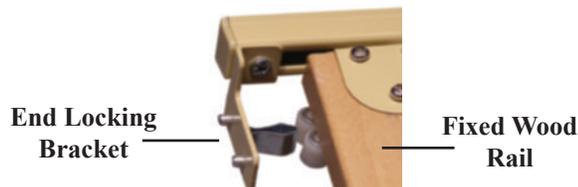

Woven Woods

(Installation Instructions - Inside / Ceiling Mount)

Step 1 Install Bracket Clips to top sill of window or underneath side of cornice dust cap for ceiling mounts. Place 1 bracket clip as close to the end as possible. Place a second bracket clip along the rail 12" from the first. (For widths greater than 96", place a third bracket clip along the rail 12" from the second.) Place additional bracket clips along the rail 24" apart. Make sure your last bracket is close to the opposite stack end.

Install as shown with bracket clip
screw hole to the back.



Bracket Clip

Installation Screw Hole

Step 2 Beginning with the Leading Rail, insert the Woven Wood Panel into the open end of the headrail track, making sure each white knob is inserted into the rail. The open end of the rail is on the left for a left panel and on the right for a right panel.

*Special Note:
Inside and Ceiling Mount
Installations require 2 people*



Headrail Channel


Step 3 Attach a headrail end cap to the open end of the headrail track. Insert end locking bracket to underside of the (headrail and end cap) using the nut and bolt provided.



Headrail End Cap



**End Locking
Bracket**



Nut

Bolt

Step 4 Attach assembled track to the bracket clips. The front of the woven wood material should be facing the room. One person must hold the rail in place until the locking screw is installed in each bracket clip.

Step 5 Insert a small screw into the hole at the back of each bracket clip. Tighten each screw. This step is **IMPORTANT** to keep your headrail secure in the brackets. Failure to attach screws will cause the headrail track to fall.


Screw Hole



The screw locks the bracket clip in place after it is attached to the Headrail, preventing the bracket clip from disengaging.

Step 6 Clip the fixed wood rail into the end locking bracket.

**End Locking
Bracket**



**Fixed Wood
Rail**